
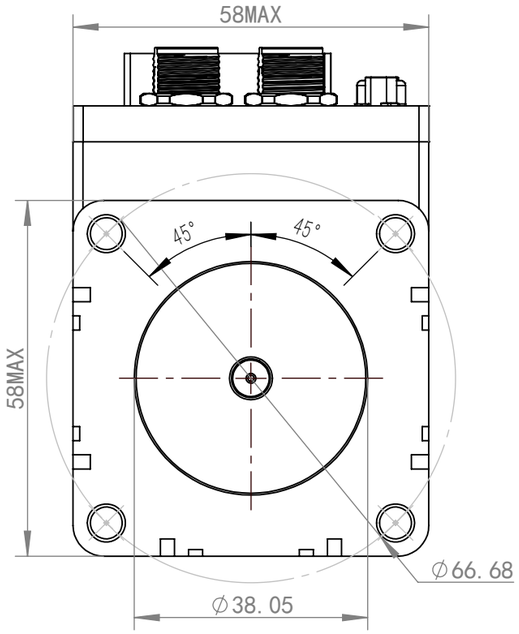
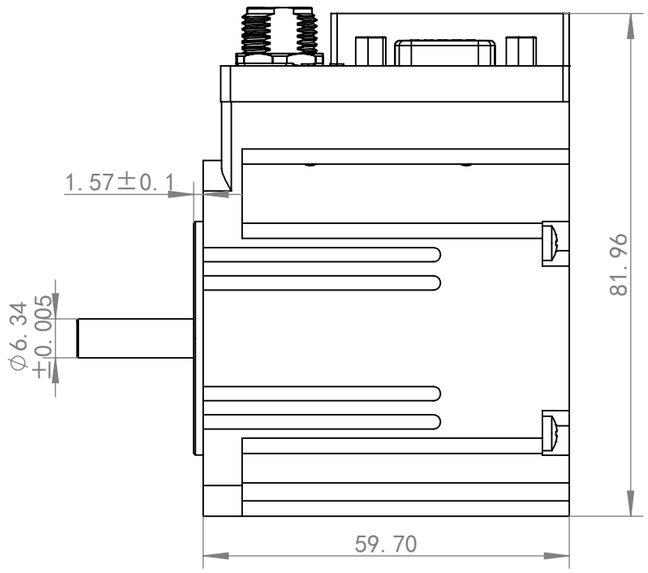
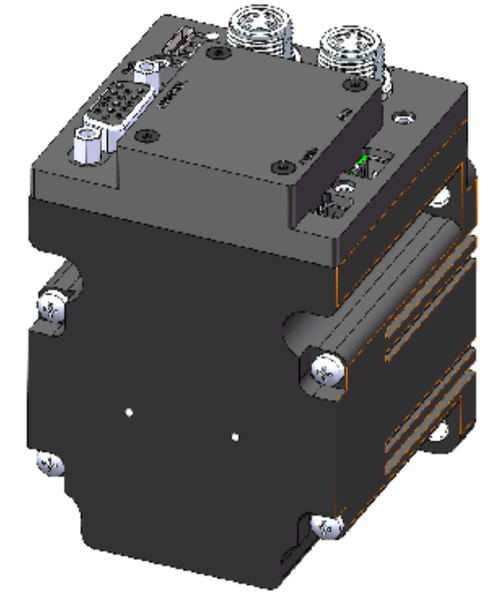
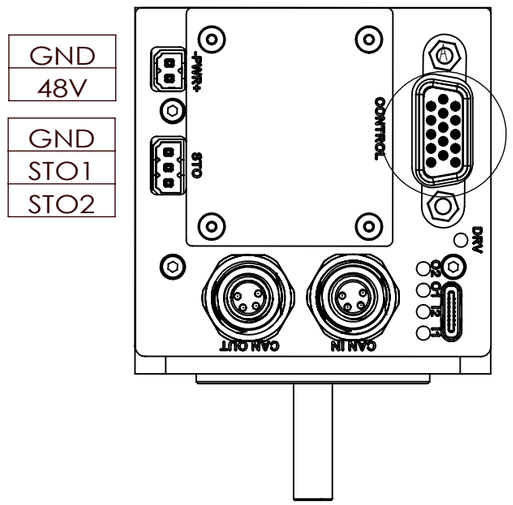
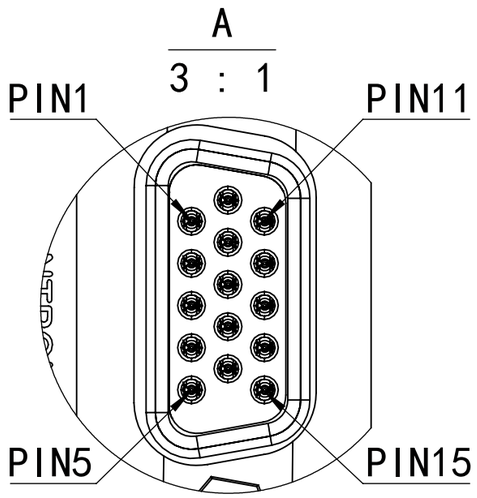


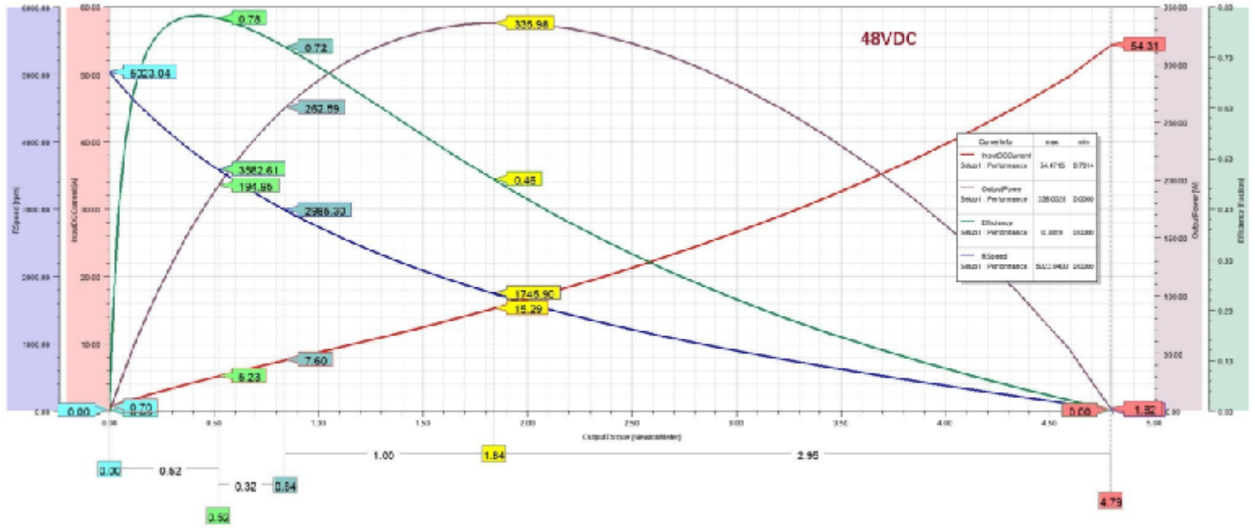


| General specifications | |
|---|---|
| Nominal voltage | 48VDC |
| Rated torque | 0.52Nm |
| Peak torque | 0.84Nm |
| Rated speed | 3500rpm |
| No load speed | 5200rpm |
| Rated current | 5.23A |
| Peak current | 7.6A |
| Nominal power | 195W |
| Shaft radial load | 31.8N |
| Shaft axial load | 13.6N |
| Operating temperature | -20°C~+85°C |
| Operating relative humidity | 0~90%RH |

| PIN | Function |
|---|---|
| 1 | OUTRET1 |
| 2 | OUTRET2 |
| 3 | OUTRET3 |
| 4 | OUTRET4 |
| 5 | OUT+24V |
| 6 | IN1 |
| 7 | IN2 |
| 8 | IN3 |
| 9 | IN4 |
| 10 | INRET |
| 11 | IN5 |
| 12 | IN6 |
| 13 | GND |
| 14 | ANALOG1+ |
| 15 | ANALOG1- |

| Revision | Indice | Date | Modification | Cartographer | Verifier |
|---|---|---|---|---|---|
| A | 1 | 2026/3/17 | Initial version | Wu XinBo | ER |

annotation :

ELIKO Technology
Room 101-102,
Building 12
No. 285, Wuyi Road
Changzhou Economic
Development Zone
Jiangsu Province,
China

This document is the property of Eliko Technology. Without the prior authorization of our company, it shall not be disclosed to or copied by any third party.

| materials: | estimated weight: | General tolerance: | surface roughness: |
|---|---|---|---|
| surface treatment: | gram | ISO 2768-mk | √Rax.x |
| surface smoothness: | | | |

DIN ISO 13715

| | |
|---|---|
| Title: | |
| N° Document : | MOTELI00826-A3 |
| N° Article : | FLXBL57-200-ELC-N |

| scale: 1:2 | paper size: A3 | pagination: 1/1 | software: Solidworks | version: 2020 |
|---|---|---|---|---|